

Mini Powered Rota Shafts/1.12" Bore

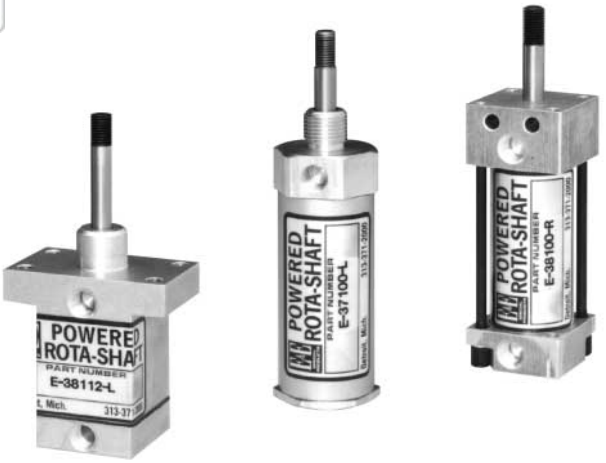

An economical solution to light-duty clamping or material handling applications. Units feature a standard 1 1/8” bore cylinder, 90 right- or left-hand rotation, a range of mounting options with threaded shafts for ease of attaching clamping details.

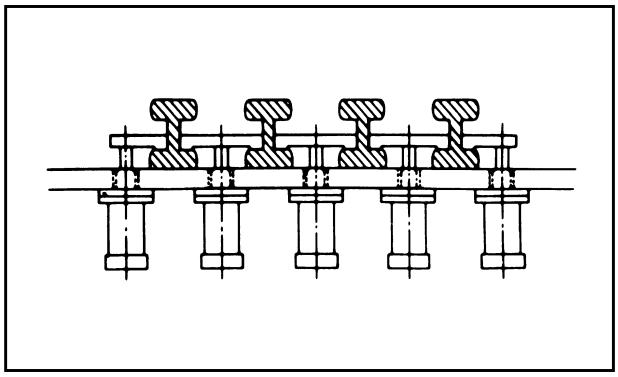

DESIGN FEATURES

- ❑ Precision machined cam track
- ❑ Hardened and ground housing
- ❑ Precision cam follower hardened and ground
- ❑ Available in a variety of mounting styles
- ❑ Aluminum body
- ❑ Stainless steel rod


APPLICATION

Typically used in pull-to-clamp situations where less clamping force is required.

Click to download CAD File (STP Format) 2dwg & 3dwg visit eandesp.com

CAD File Name=E38100

Part No. E-38100-R, E-38100-L

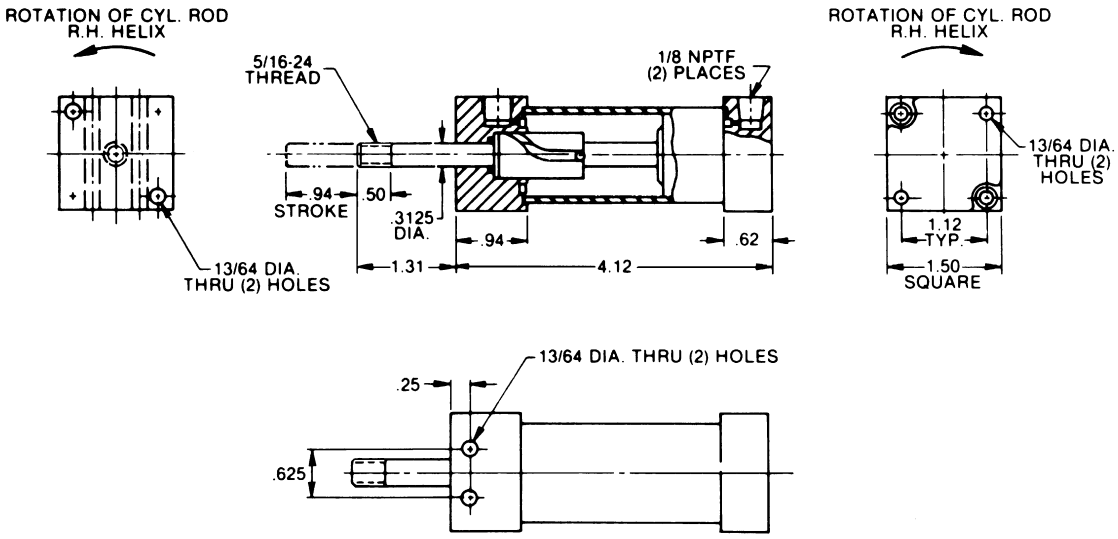

CAD Directory
Linear-Rotary\Internal


RIGHT HAND SHOWN, LEFT HAND ALSO STANDARD

Mini Powered Rota Shafts/1.12" Bore

Click to download CAD File (STP Format) 2dwg & 3dwg visit eandesp.com

CAD File Name=E38112

Part No. E-38112-R, E-38112-L

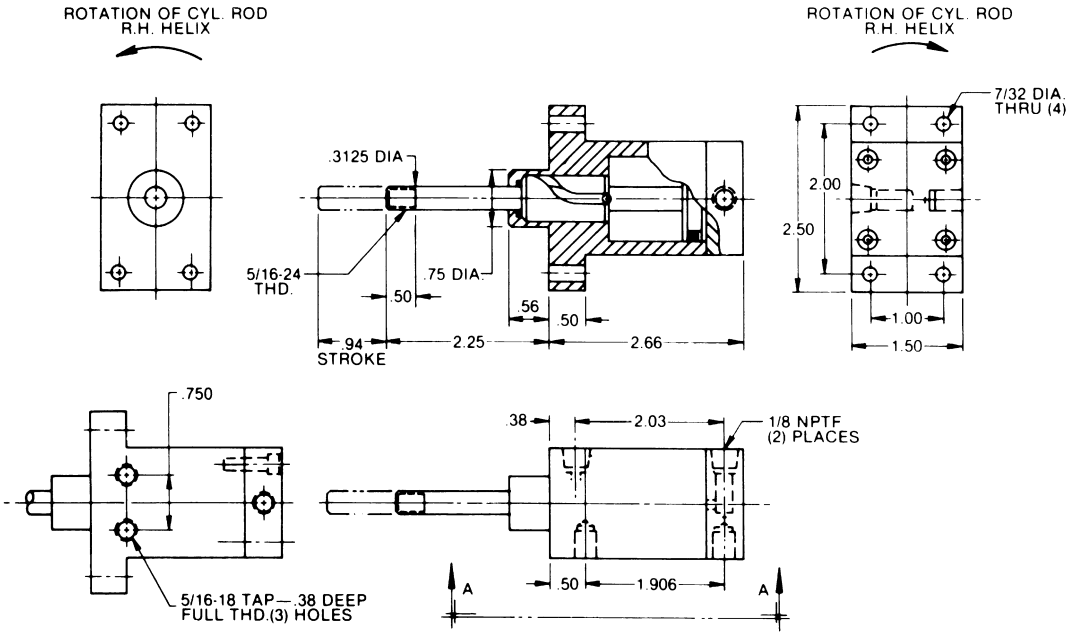


RIGHT HAND SHOWN, LEFT HAND ALSO STANDARD

CAD Directory
Linear-Rotary/Internal

CAD File Name=E37100

Part No. E-37100-R, E-37100-L

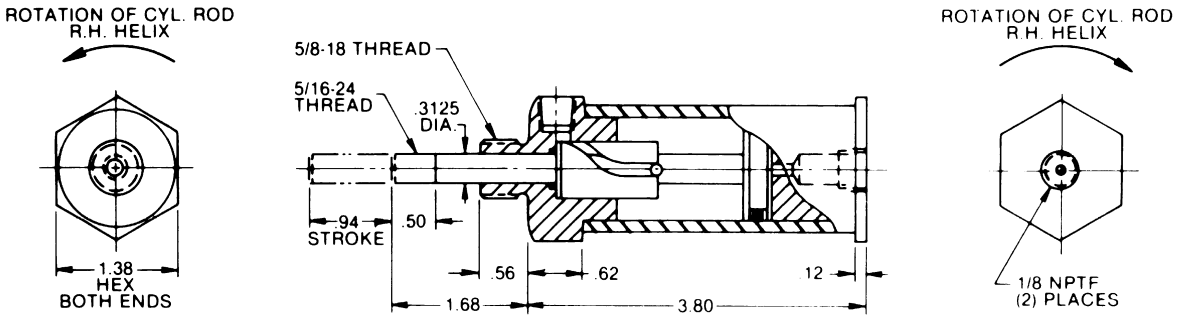

RIGHT HAND SHOWN, LEFT HAND ALSO STANDARD

TRAVEL FOR ALL UNITS SHOWN

.35 Straight
.59 During 90°
.94 Total

CLAMPING FORCE AT MAXIMUM

100 P.S.I. 100 Push 92 Pull

CAD Directory
Linear-Rotary\Internal